

COMMERCIAL REFRIGERATED SHOWCASE

CF-900 CF-1200 CF-1800

STANDARD FEATURES


- Brilliant Internal LED on top and under each shelf
- Digital temperature controller and display
- 4 Adjustable frosty glass shelves
- Tempered glass at 2 sides
- With front curtain
- 4 casters, 2 adjustable feet
- Ventilated cooling system
- Automatic defrost
- Hot air at front and 2 sides to remove water on glass
- Condensation water evaporated automatically



COMMERCIAL REFRIGERATED SHOWCASE

CF-900 CF-1200 CF-1800

PLAN VIEW

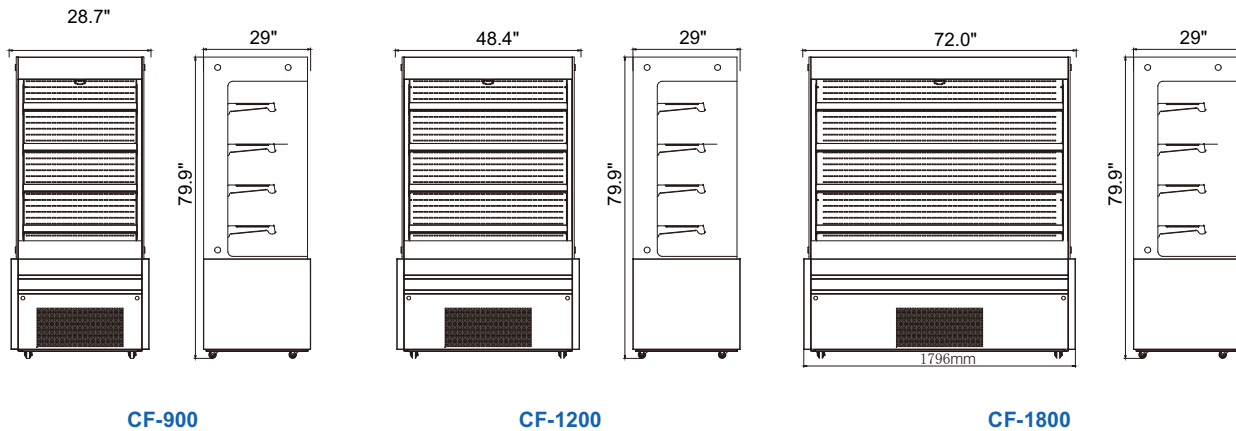

REFRIGERATED SHOWCASE

MODEL	POWER	CAPACITY	DIMENSIONS (INCHES)			REFRIGERANT	COOLING TYPE	TYPE OF CLIMATE	TEMPERATURE RANGE	ELECTRICAL	NET WEIGHT	GROSS WEIGHT	DEFROSTING
			LENGTH	DEPTH	HEIGHT								
CF-900	1320W	17.6cu.ft.	28.7"	29"	79.9"	R290	Ventilated	4	35.6-46.4°F	110-120V /60HZ	189KG	201KG	Automatic
CF-1200	1600W	26.8cu.ft.	48.4"	29"	79.9"	R290	Ventilated	4	35.6-46.4°F	110-120V /60HZ	220.5KG	238KG	Automatic
CF-1800	2050W	40.9cu.ft.	72.0"	29.0"	79.9"	R290	Ventilated	4	35.6-46.4°F	220V/60HZ	293KG	316KG	Automatic